

350 lbs. load capacity*
*includes weight of user plus materials

ALUMINUM ATTIC LADDER

EVEREST SERIES



Adjustable
Easily adjustable spring tension.



EZ-Hang Strap
Exclusive "EZ-Hang Strap" system for quick and easy installation.



Heavy Duty Hinges
Heavy duty hinges at rail joints limit side to side motion.




Angle Bracing
Angle bracing on top of each climbing section for strength and stability.



Insulated Door
Fully insulated door void helps reduce energy costs.

MODEL	DIMENSIONS ROUGH CEILING OPENING	(A) FITS CEILING HEIGHTS MIN. MAX.	(B) APPROX. LANDING SPACE	(C) APPROX. PROJ. WIDTH	APPROX. WEIGHT	APPROX. CUBES
AL258P	25-1/2" x 63"	10' 12'	83-1/8"	90"	67	11.9

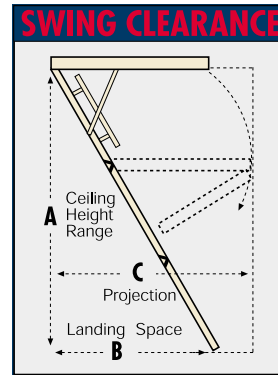

300 lbs. load capacity*
*includes weight of user plus materials

SAFEGARD™

NONCONDUCTIVE MOBILE MAINTENANCE PLATFORM

FW SERIES



This nonconductive, Mobile Maintenance Platform is specially designed for working around electricity. Its nonconductive materials and superior construction provide a higher degree of safety on jobs where electrical lines and equipment are present.

- Heavy-Duty, Slip Resistant, Step Assembly.
- Forward-Descent Design.
- Nonconductive Platform Assembly.
- Standard Easy-Turn Design On 7-15 Stepladders
- Reinforced Back Assembly.
- Heavy-Duty Base Assembly.
- Nonconductive Handrails and Guardrail.
- Step-Lock Safety Feature with Handle for Wheel Engagement.
- Safety Yellow Color.

FW2400 Series 24"x17" Platform 300 lb. Capacity 1-Person

MODEL	SIZE	HT. TO TOP STEP	MAX. LENGTH	MAX. WIDTH	MAX. HT. W/RAILS	SHIPPING WT. (LBS)	APPROX. CUBES
FW2404	4	3' 2 1/2"	54 3/4"	32 3/8"	6' 8 1/2"	159	18
FW2406	6	4' 9 1/2"	71 7/8"	32 3/8"	8' 3 1/2"	189	21
FW2408	8	6' 4 1/2"	89"	32 3/8"	9' 10 1/2"	258	28
FW2410	10	7' 11 1/2"	106 1/8"	32 3/8"	11' 5 1/2"	404	60
FW2412	12	9' 6 1/2"	123 1/4"	36 3/8"	13' 1/2"	440	71
FW2414	14	11' 1 1/2"	140 3/8"	39 3/8"	14' 7 1/2"	530	83
FW2415	15	11' 11"	148 15/16"	39 1/2"	15' 5"	545	89



An optional outrigger is also available for compliance with local code.
6-12 step (328000A)
13-15 step (328000B)

Patent #5,791,434